

Super Silent Blowers

E1033H/L



97×95×33

(3.8"×3.7"×1.3")

Max. airflow: 1.25 m³/min
Max. static pressure: 840Pa
Mass: 120g (~5), 140g (~6/7/8),
160g (~A/B/C)

Fan model code

E1033H12B5AM-04

E1033H12B6AM-04

E1033H12B7AP-00

E1033H12B7AS-00

E1033H12B7AZ-00

E1033H12B8AP-00

E1033H12B8AS-00

E1033H12B8AZ-00

E1033H12BAAP-00

E1033H12BAAS-00

E1033H12BAAZ-00

E1033H24B5AM-04

E1033H24B6AP-00

E1033H24B6AS-00

E1033H24B6AZ-00

E1033H24B7AP-00

E1033H24B7AS-00

E1033H24B7AZ-00

E1033H24B8AP-00

E1033H24B8AS-00

E1033H24B8AZ-00

E1033H24BAAP-00

E1033H24BAAS-00

E1033H24BAAZ-00

E1033L12BBAZ-00

E1033L24BBAZ-00

E1033L12BCAZ-00

E1033L24BCAZ-00

Standard specification

Max. Airflow m ³ /min	Max. Static Pressure CFM	Max. Static Pressure Pa	Noise inH ₂ O	Noise dB	Speed min ⁻¹	Voltage spec. V		Current mA		Model Code	Operating Temp. Range°C
						Rating	Operating Range	Rating	Starting		
1.25	44	840	3.36	62	5800	12	8.4-13.2	1950	3100	E1033L12BCAZ-00	-20 ~ +70
						24	12-26.4	950	1650	E1033L24BCAZ-00	
1.15	40.6	700	2.81	60	5300	12	8.4-13.2	1400	3100	E1033L12BBAZ-00	
						24	12-26.4	700	1650	E1033L24BBAZ-00	
1.14	40	500	2.01	58	4850	12	8.4-13.2	1250	2100	E1033H12BAAZ-00	-20 ~ +60
						24	16-26.4	630	1850	E1033H24BAAZ-00	
0.85	30	320	1.29	51	3450	12	4.5-13.2	770	1950	E1033H12B8AZ-00	
						24	10-26.4	390	940	E1033H24B8AZ-00	
0.76	27	260	1.05	48	3100	12	5-13.2	590	1260	E1033H12B7AZ-00	-20 ~ +70
						24	10-26.4	300	710	E1033H24B7AZ-00	
0.64	23	185	0.74	43	2600	12	5-13.2	400	820	E1033H12B6AM-04	
						24	10-26.4	220	400	E1033H24B6AZ-00	
0.53	19	120	0.48	39	2200	12	5-13.8	250	500	E1033H12B5AM-04	
						24	10-26.4	120	260	E1033H24B5AM-04	


● Figures in the table are average measured values. Please request the product delivery specification when preparing a purchase specification.
● The characteristics are the values at rated voltage (12 V or 24 V), and normal temperature and humidity.

General specification


Materials Used	Venturi: ABS and PBT synthetic resins Impeller: ABS and PBT synthetic resins Bearing: Both side shielded ball bearing
Motor	Brushless DC motor, Protection type: Current shut off by detecting lock state, automatically reset
Common Elec. Spec.	See pages G-11, G-12, G-13.
Standard Carton	50 to a carton of (450 x 380 x 220) mm, mass 8 kg

Standard airflow and static pressure characteristics (At rated voltage)

[By double chamber method]

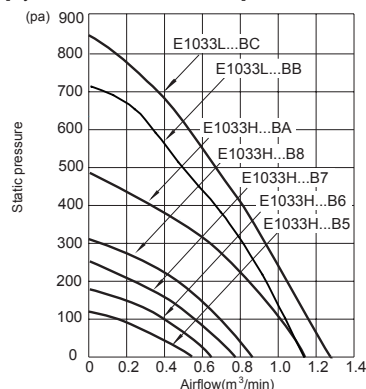

Wiring connection diagram

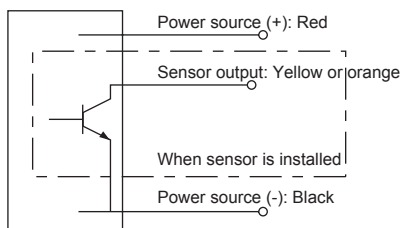

Super silent blower with sensor


Rated Vol.	Model Code				
12 V	E1033H12B5AM-04 (note 1)	E1033H12B6AM-04 (note 1)	E1033H12B7AS-00	E1033H12B8AS-00	E1033H12BAAS-00
			E1033H12B7AP-00	E1033H12B8AP-00	E1033H12BAAP-00
24 V	E1033H24B5AM-04 (note 1)	E1033H24B6AS-00	E1033H24B7AS-00	E1033H24B8AS-00	E1033H24BAAS-00
		E1033H24B6AP-00	E1033H24B7AP-00	E1033H24B8AP-00	E1033H24BAAP-00

- AM-04 becomes a lock detection sensor (S) type or pulse sensor (P) type in accordance with the connector connection method.
Note 1: Purchase a sensor output cord (See page G-66) optionally available or the customer shall provide a cord with equivalent specifications if a sensor function is desired.
- NIDEC SERVO can meet many of your requirements for customization, such as special connectors, other sensors not listed above, variable speed specifications, and other modifications. Please contact NIDEC SERVO during your product planning and development stage.
- The listed products are registered in the following overseas standards files. UL/cUL: E48889, TUV: R50004410
- PWM (pulse width modulation) allowing for variable speed control is available in some models (reference the G-51 spec).

External dimensions in mm (inches)


Lead wire type (E1033)

Lead wire spec. AWG24 UL3266
Color (+) Red
(-) Black

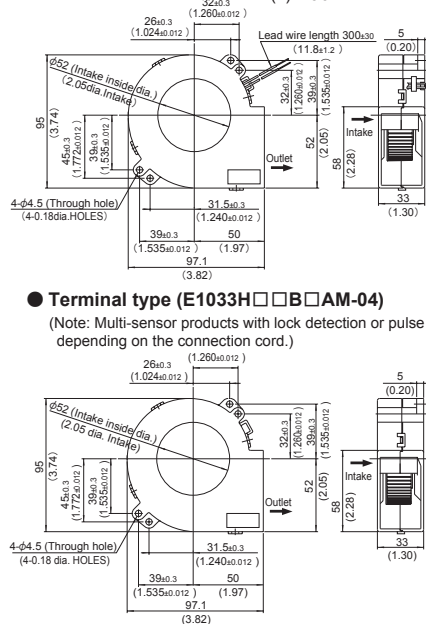


Terminal type (E1033H□□□AM-04)

(Note: Multi-sensor products with lock detection or pulse output, depending on the connection cord.)

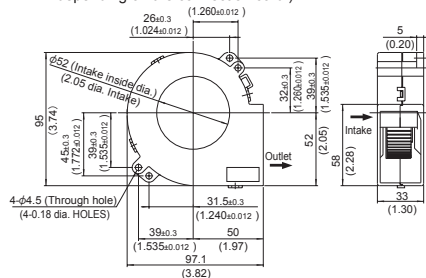

Accessory cord (DCLD030ZT-ZZ01)

This cord is supplied with the terminal type of (-04).
Cords for S and P sensors also optionally available.
(See page G-66.)

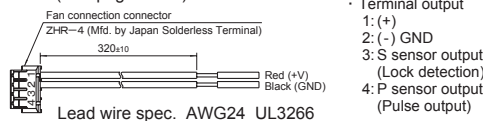

Lead wire spec. AWG24 UL3266

Lead wire ends are sheathed to protect the conductors.
(Sheath peeling dimension 10 ±5)

Fan model code

- D0925C12B8ZP-00
- D0925C24B8ZP-00
- D1238B48B7ZP-00
- D1751M24B4ZP-00
- D1751M24B5ZP-00
- D1751M24B6ZP-00
- D1751M24B7ZP-00
- D1751M24B8ZP300
- D1751M24B9ZP300
- D1751M48B4ZP-00
- D1751M48B5ZP-00
- D1751M48B6ZP-00
- D1751M48B7ZP-00
- D1751M48B8ZP-00
- D1751M48B9ZP-00
- D1751S24B4ZP-00
- D1751S24B5ZP-00
- D1751S24B6ZP-00
- D1751S24B6ZQ-00
- D1751S24B7ZP-00
- D1751S24B8ZP300
- D1751S24B9ZP300
- D1751S48B4ZP-00
- D1751S48B5ZP-00
- D1751S48B6ZP-00
- D1751S48B7ZP-00
- D1751S48B8ZP-00
- D1751S48B9ZP-00
- D1751S24B4ZR-13
- E1033H12B8ZS-00
- E1033H12BAZP-00
- E1033H24BAZS-00
- E1033H24BAZP-00
- E2271Z24B5YP-00
- E2271Z48B7ZP-00

Lineup of PWM variable-speed semi-standard products



- A PWM signal from the customer equipment is input to the control line (blue) of the fan motor for variable-speed operation of fans and blowers. (Input and noise can be reduced when the internal temperature of the customer equipment is low, such as during idling.)
- Sizes
Axial fans: □60 mm~□172 mm
Blower: □70 mm~φ220 mm

Characteristics for reference

(The characteristics are typical characteristics and their curves will differ, depending on the particular model)

- Standard values for PWM control signal - speed specification (at rated voltage, open, and normal temperature and humidity)

I _{out}	1 mA MAX.
V _{out}	5 V MAX.
V _{Losat}	0.4 MAX.
Freq.	500 Hz~5000 Hz

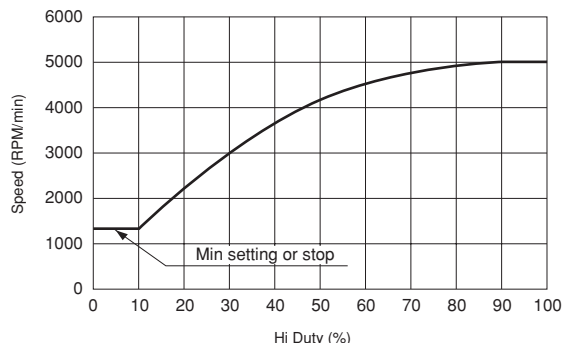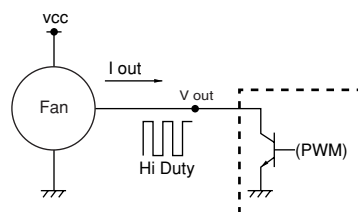

Semi-standard products (Products in regular production)

Size	Model Code	Max. Airflow		Max. Static Pressure		Noise dB	Speed min ⁻¹		Voltage Spec. V		Operating Temp. Range °C
		m ³ /min	CFM	Pa	inH ₂ O		Max.	Min.	Rating	Operating Range	
□92×25mm	D0925C12B8ZP-00	2	71	67	0.27	40	4450	1000	12	10.2-13.2	-20 ~ 60°C
	D0925C24B8ZP-00										
□120×38mm	D1238B48B7ZP-00	4.4	155	170	0.68	54	4000	1250	48	40.8-55.2	-20 ~ 70°C
	D1751M24B9ZP300										
φ172×150×51mm	D1751M48B9ZP-00	14.2	501	580	2.33	75	6800	3200	24	16-28	-20 ~ 70°C
	D1751M24B8ZP300										
	D1751M48B8ZP-00	12.7	448	510	2.05	72	6100	2600	48	36-60	
	D1751M24B7ZP-00										
	D1751M48B7ZP-00	11.4	402	410	1.65	69	5400	1500	24	12-27.6	
	D1751M24B6ZP-00										
	D1751M48B6ZP-00	10.2	360	315	1.27	64	4800	1000	48	36-60	
	D1751M24B5ZP-00										
	D1751M48B5ZP-00	9	318	260	1.04	61	4200	1000	48	36-60	
	D1751M24B4ZP-00										
	D1751M48B4ZP-00	8	282	205	0.82	57	3800	1000	24	12-27.6	
	D1751S24B9ZP300										
φ172×51mm	D1751S48B9ZP-00	14.2	501	640	2.57	68	6800	3200	48	36-60	-20 ~ 60°C
	D1751S24B8ZP300										
	D1751S48B8ZP-00	12.7	448	520	2.09	65	6100	2600	48	36-60	
	D1751S24B7ZP-00										
	D1751S48B7ZP-00	11.4	402	435	1.75	62	5400	1500	24	12-27.6	
	D1751S24B6ZP-00										
	D1751S48B6ZP-00	10.2	360	335	1.35	59	4800	1000	48	36-60	
	D1751S24B5ZP-00										
	D1751S48B5ZP-00	9	318	270	1.08	56	4200	1000	48	36-60	
	D1751S24B4ZP-00										
	D1751S48B4ZP-00	8	282	220	0.88	53.5	3800	1000	24	12-27.6	
	D1751S24B4ZR-13										
※	D1751S24B4ZR-13	8	282	230	0.92	53.5	3800	1500	24	20.4-27.6	
97×95×33mm (Blowers)	E1033H12B8ZS-00	0.85	30	320	1.29	51	3450	1250	12	10.8-13.2	-20 ~ 70°C
	E1033H12BAZP-00										
	E1033H24BAZP-00	1.14	40	500	2.01	58	4850	1800	24	21.6-26.4	
	E1033H24BAZS-00										
φ220×71mm (Blowers)	E2271Z48B7ZP-00	18.1	639	600	2.41	74	3200	1000	48	36-57	-20 ~ 60°C
	E2271Z24B5YP-00										
		14.7	519	470	1.89	66	2650	530	24	21.6-26.4	-20 ~ 40°C

※: The D1751S24B4ZR-13 is a FFU (Fan Filter Unit) product. Only this version has 'voltage speed control' whereby speed is varied by control voltage.


- Aside from the above models, please see also the high pressure, variable speed G series fans. Details may be found in specs G-31 to G-36.
- The lineup of variable-speed fans and blowers will be expanded regularly. Visit the NIDEC SERVO Website for information on the latest lineup.
- Direct your inquiry to NIDEC SERVO for connector termination to lead wires, for sensor specifications other than those contained in the catalog and for variable speed specifications. (Products tailored to voltage command control and resistance value command control are also available)
- To ensure correct installation and smooth operation please obtain a drawing for approval or reference drawing from NIDEC SERVO Co.

Plug cords for AC fans

(Common specification: Rated 3 A, voltage 250 V, dielectric strength 1 minute at 1500 V 50 Hz)

D2P1 cord (Mass 35 g)


Certified under the Electrical Appliance and Material Safety Law (Japan) (<PS>E mark approved)
Cord 0.18 dia. 30 conductors Black, heat resistant vinyl

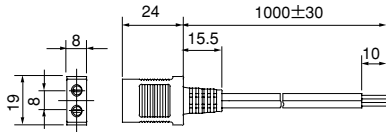

* D2P2 cord with 2m length also available.

UL2P1 cord (Mass 41 g)


UL standard product (UL file No. E78112)
Cord 0.16 dia. 41 conductors Black, heat resistant vinyl

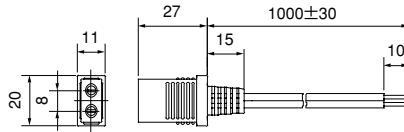

* UL2P2 cord with 2m length also available.

T2P1 cord

For wiring inside equipment
Cord 0.18 dia. 30 conductors Black, heat resistant vinyl




* T2P2 cord with 2m length also available.

D3P1 cord (Mass 59 g)

Certified under the Electrical Appliance and Material Safety Law (Japan) (<PS>E mark approved)
Cord:


For power feeding 0.18 dia. 30 conductors Black, heat resistant vinyl
For grounding 0.18 dia. 50 conductors Black, heat resistant vinyl

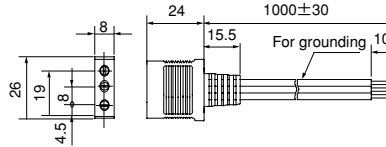

UL3P1 cord (Mass 60 g)

UL standard product (UL file No. E78112)
Cord:

For power feeding 0.16 dia. 41 conductors Black, heat resistant vinyl
For grounding AWG18 green/yellow spiral, heat resistant vinyl

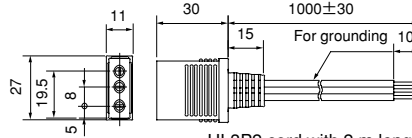


* UL3P2 cord with 2 m length also available.

List of mating fan series

Cord	T2P1	T2P2	D2P1	D2P2	D3P1	UL2P1	UL2P2	UL3P1	PL3P2
WE	○	○	○	○		○	○		
KA	○	○	○	○		○	○		
CU	○	○	○	○		○	○		
CN (2 terminals)	○	○	○	○		○	○		
CN (3 terminals)					○			○	○
MA	○	○	○	○		○	○		
PA	○	○	○	○		○	○		

Plug cords for DC fans

DCLD030ST-ZZ01 (S sensor output cord)

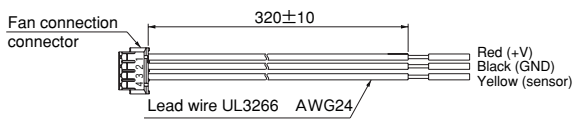

DCLD030PT-ZZ01 (P sensor output cord)



• Lead wire ends are sheathed to protect conductors. (Sheath peeling dimension 10±5)

Component (Model Code)	Mating Model Code
DCLD030ST-ZZ01	E1033H□□B□AM-04
DCLD030PT-ZZ01	

DC axial fans & blowers with sensors


The DC fans and blowers of NIDEC SERVO have a function to send an alarm signal when the fan motor revolutions slow down. Several systems are used to cut off the system power supply by this alarm signal, with three types of sensors available. Select the right type of sensor in accordance with the purpose of use. The lead wire for the sensor is yellow. The output type is an open collector output for all three types.

■ Sensor type

1. Lock detection type (Product code: S)

The output signal indicates an [L] state (transistor is ON) while the propeller is rotating, changing to an [H] state (transistor is OFF) less than five seconds after the propeller stops rotating. The propeller automatically restarts operation within five seconds when the lock is unlocked. ([H] → [L] 5 s). If the pull-up voltage is live, the [H] state (transistor is OFF) will engage in less than five seconds, even when the power is turned off.

- Specification: $V_{CE} = 28\text{ V max}$ (55.2 V max for 48 V products)
 $I_C = 5\text{ mA max}$
($V_{CE(SAT)} = 0.4\text{ V max}$)
- Output waveform

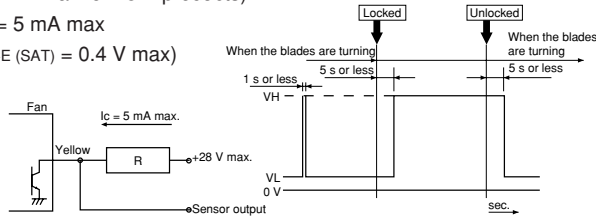


※When the power is turned on, the state sometimes becomes high [H] for several hundred ms.

2. Pulse output type (Product code: P)

A rectangular wave of two pulses will be output for each turn of the propeller while the propeller is rotating, outputting two types of signal depending on the propeller position when the propeller is locked. (See the note below ※)

- Specification: $V_{CE} = 28\text{ V max}$ (55.2 V max for 48 V products)
 $I_C = 5\text{ mA max}$
($V_{CE(SAT)} = 0.4\text{ V max}$)
- Output waveform

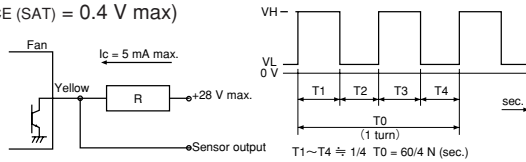

※Output signal waveform when the fan is stopped: The following two types of waveform are output, depending on the blade position when the propeller is stopped:
Pulse outputs of High - constant or restart timing (0.05 Hz to 2 Hz).


3. Speed detection type (Product code: Q)

The output signal indicates the [H] state when the propeller revolutions are slower than the preset speed, changing to the [L] state when the propeller revolutions exceed the reset speed.

[Products with a reversed output waveform are also available, suitable for a wired OR connection when several fans are installed. Contact NIDEC SERVO for further information. {Former code: SQ, new code (15 - digit code products): R}]

- Specification: $V_{CE} = 28\text{ V max}$ (55.2 V max for 48 V products)
 $I_C = 5\text{ mA max}$
($V_{CE(SAT)} = 0.4\text{ V max}$ at 5 mA)

● Output waveform

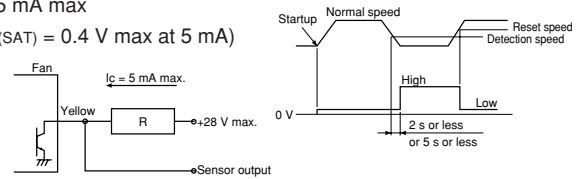

Note: The output waveform for type SQ (R) will be reversed.
The speed setting for the alarm output is about half the rated speed.
For more detailed information, please request a product delivery specification from NIDEC SERVO.