


## Plug cords for AC fans

(Common specification: Rated 3 A, voltage 250 V, dielectric strength 1 minute at 1500 V 50 Hz)

### D2P1 cord (Mass 35 g)


Certified under the Electrical Appliance and Material Safety Law (Japan) (<PS>E mark approved)  
Cord 0.18 dia. 30 conductors Black, heat resistant vinyl

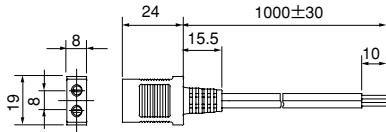

\* D2P2 cord with 2m length also available.

### UL2P1 cord (Mass 41 g)


UL standard product (UL file No. E78112)  
Cord 0.16 dia. 41 conductors Black, heat resistant vinyl

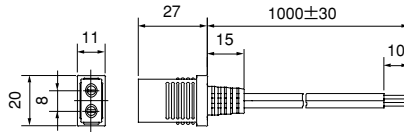

\* UL2P2 cord with 2m length also available.

### T2P1 cord

For wiring inside equipment  
Cord 0.18 dia. 30 conductors Black, heat resistant vinyl




\* T2P2 cord with 2m length also available.

### D3P1 cord (Mass 59 g)

Certified under the Electrical Appliance and Material Safety Law (Japan) (<PS>E mark approved)  
Cord:


For power feeding 0.18 dia. 30 conductors Black, heat resistant vinyl  
For grounding 0.18 dia. 50 conductors Black, heat resistant vinyl

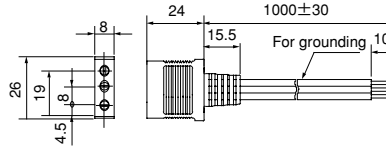

### UL3P1 cord (Mass 60 g)

UL standard product (UL file No. E78112)  
Cord:

For power feeding 0.16 dia. 41 conductors Black, heat resistant vinyl  
For grounding AWG18 green/yellow spiral, heat resistant vinyl

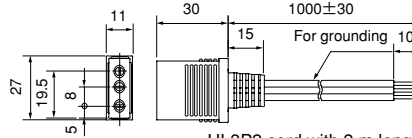

\* UL3P2 cord with 2 m length also available.

## List of mating fan series

Cord	T2P1	T2P2	D2P1	D2P2	D3P1	UL2P1	UL2P2	UL3P1	PL3P2
WE	○	○	○	○		○	○		
KA	○	○	○	○		○	○		
CU	○	○	○	○		○	○		
CN (2 terminals)	○	○	○	○		○	○		
CN (3 terminals)					○			○	○
MA	○	○	○	○		○	○		
PA	○	○	○	○		○	○		

## Plug cords for DC fans

### DCLD030ST-ZZ01 (S sensor output cord)



### DCLD030PT-ZZ01 (P sensor output cord)



• Lead wire ends are sheathed to protect conductors. (Sheath peeling dimension 10±5)

Component (Model Code)	Mating Model Code
DCLD030ST-ZZ01	E1033H□□B□AM-04
DCLD030PT-ZZ01	